

**Glass Door Merchandisers****Sliding Door Models****TGM-35R****TGM-48R****TGM-69R****FEATURES / BENEFITS**

- EFFICIENT REFRIGERATION SYSTEM**  
 Turbo Air glass door refrigerators are designed with oversized and balanced (CFC Free R-134A) refrigeration systems. These include efficient evaporators and condensers for faster cooling and greater efficiency.
- TASTEFUL AND MODERN APPEARANCE**  
 The design of our products is one of our top priorities. Whether you have a restaurant, bar, convenience store or gas station, Turbo Air refrigerators will compliment the appearance of your operation.
- DOUBLE PANE GLASS DOORS WITH HEAT REFLECTING FILM**  
 Equipped with unique double pane glass doors with a layer of patented, transparent thermal insulating film applied between the two glass layers. Lightweight door construction reduces door maintenance and roller wear, and facilitates smooth door.
- ADJUSTABLE, HEAVY DUTY, PE(POLYETHYLENE) COATED WIRE SHELVES**
- HIGH-DENSITY POLYURETHANE INSULATION**  
 The entire cabinet structure formed-in-place using high density, CFC free polyurethane insulation.
- ERGONOMICALLY DESIGNED DOOR**  
 Customers' fatigue fades away with easy grip handles and doors that open effortlessly. These features along with self-closing doors make this the ultimate choice in customer convenience.
- BOTTOM MOUNT COMPRESSOR UNITS**  
 Turbo Air's bottom mount compressor allows easier access for service and extra storage space above. In addition, the lower area provides a cooler and less greasy operating environment which results in reduced compressor running time.
- REFRIGERATOR HOLDS 33°F ~ 38°F FOR THE BEST IN BEVERAGE PRESERVATION**

Distributed By:

Commercial Refrigeration Service, Inc.

<http://WWW.IceCubes.NET>

623-869-8881 or toll free 866-IceMakers

Model	Sliding Door	CU./FT.	#of Shelves	HP	AMPS	Crated Weight	L D H
<b>TGM-35R</b>	2	35	8	1/2	109	419	41 1/2 x 30 x 78 1/2
<b>TGM-48R</b>	2	48	8	1/2	109	485	56 x 30 x 78 1/2
<b>TGM-69R</b>	3	69	12	3/4	120	661	78 x 30 1/9 x 79 1/5

## TGM-35R / TGM-48R / TGM-69R SPECIFICATIONS

MODEL	TGM-35R	TGM-48R	TGM-69R
Exterior Dimension (LxDxH)	41 1/2x30x78 1/2	56x30x78 1/2	78x30 1/8x79 1/5
Interior Dimension (in)	37 8/9x23 3/5x61 2/7	52 8/9x23 3/5x61 2/7	74 2/5x20 1/8x61 3/5
Compressor (HP)	1/2	1/2	3/4
Voltage (1) NEMA-5-15P	Ⓢ 115V/60Hz	Ⓢ 115V/60Hz	Ⓢ 115V/60Hz
Amp	10.9A	10.9A	12A
Power Cord Length	6.1 ft.	6.2 ft.	6.6 ft.
Plug-In Installation	NEMA 5-15P	NEMA 5-15P	NEMA 5-15P
Net Weight	410lbs	463lbs	654lbs
Shelves	8EA	8EA	12EA
Shelf size	18x23 2/5	25 1/5x23 2/5	23 1/2x23 2/3
Bottle Capacity	Full Load Line		
	420	560	840
	336	448	672

\*Design and specifications subject to change without notice.

■ **WARRANTY :** 1 Years Labor and Parts Warranty  
 Additional 4 Years Warranty on Compressor

### STANDARD FEATURES

- White color cabinet.
- Black color frame on door.
- Double pane glass door with thermal film.
- Fully adjustable wire shelves with non-corrosive coating.

### OPTION


- Casters (4" or 5") are available.
- Shelf dividers are available.
- Customized graphics & colors available in quantity




LISTED  
 COMMERCIAL  
 REFRIGERATOR  
 AND/OR FREEZER  
 452K




ISO9001

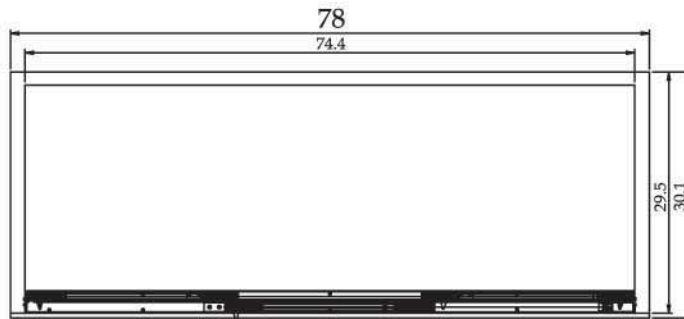


TGM-69R PLAN VIEW

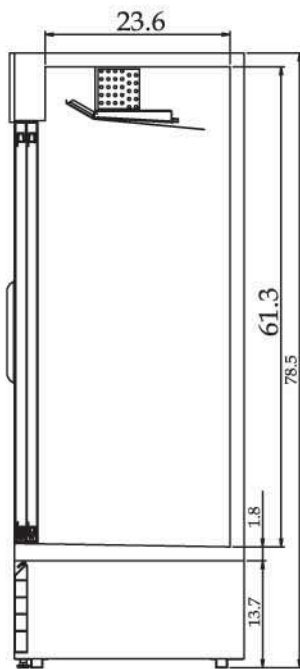


TGM-35R/48R SIDE VIEW

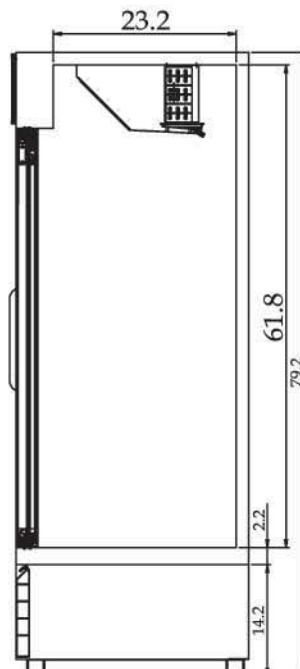

TGM-69R SIDE VIEW

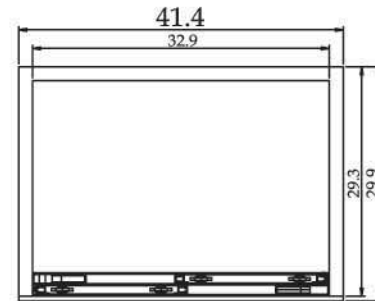

TGM-35R PLAN VIEW

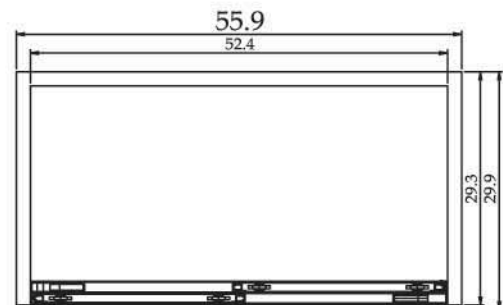

TGM-48R PLAN VIEW

(unit : inch)